Cupertino Bracket Wall

CO1434, CO1444, CO1451, CO1461 | 1.0

VISUAL COMFORT & CO.

STUDIO COLLECTION

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

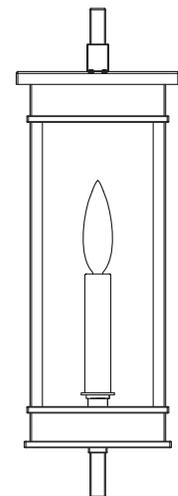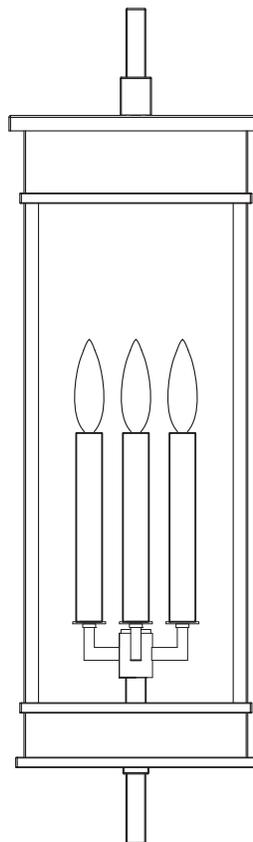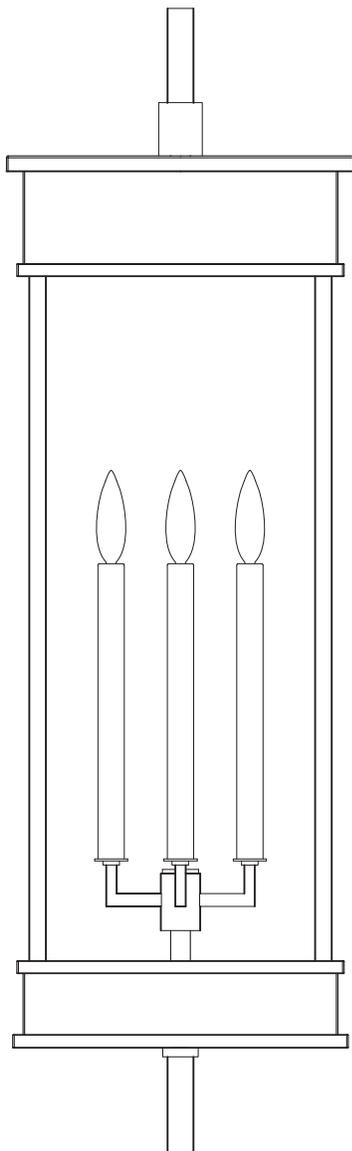This product is safety listed for wet locations.

Incandescent version may be dimmed with a standard incandescent dimmer.
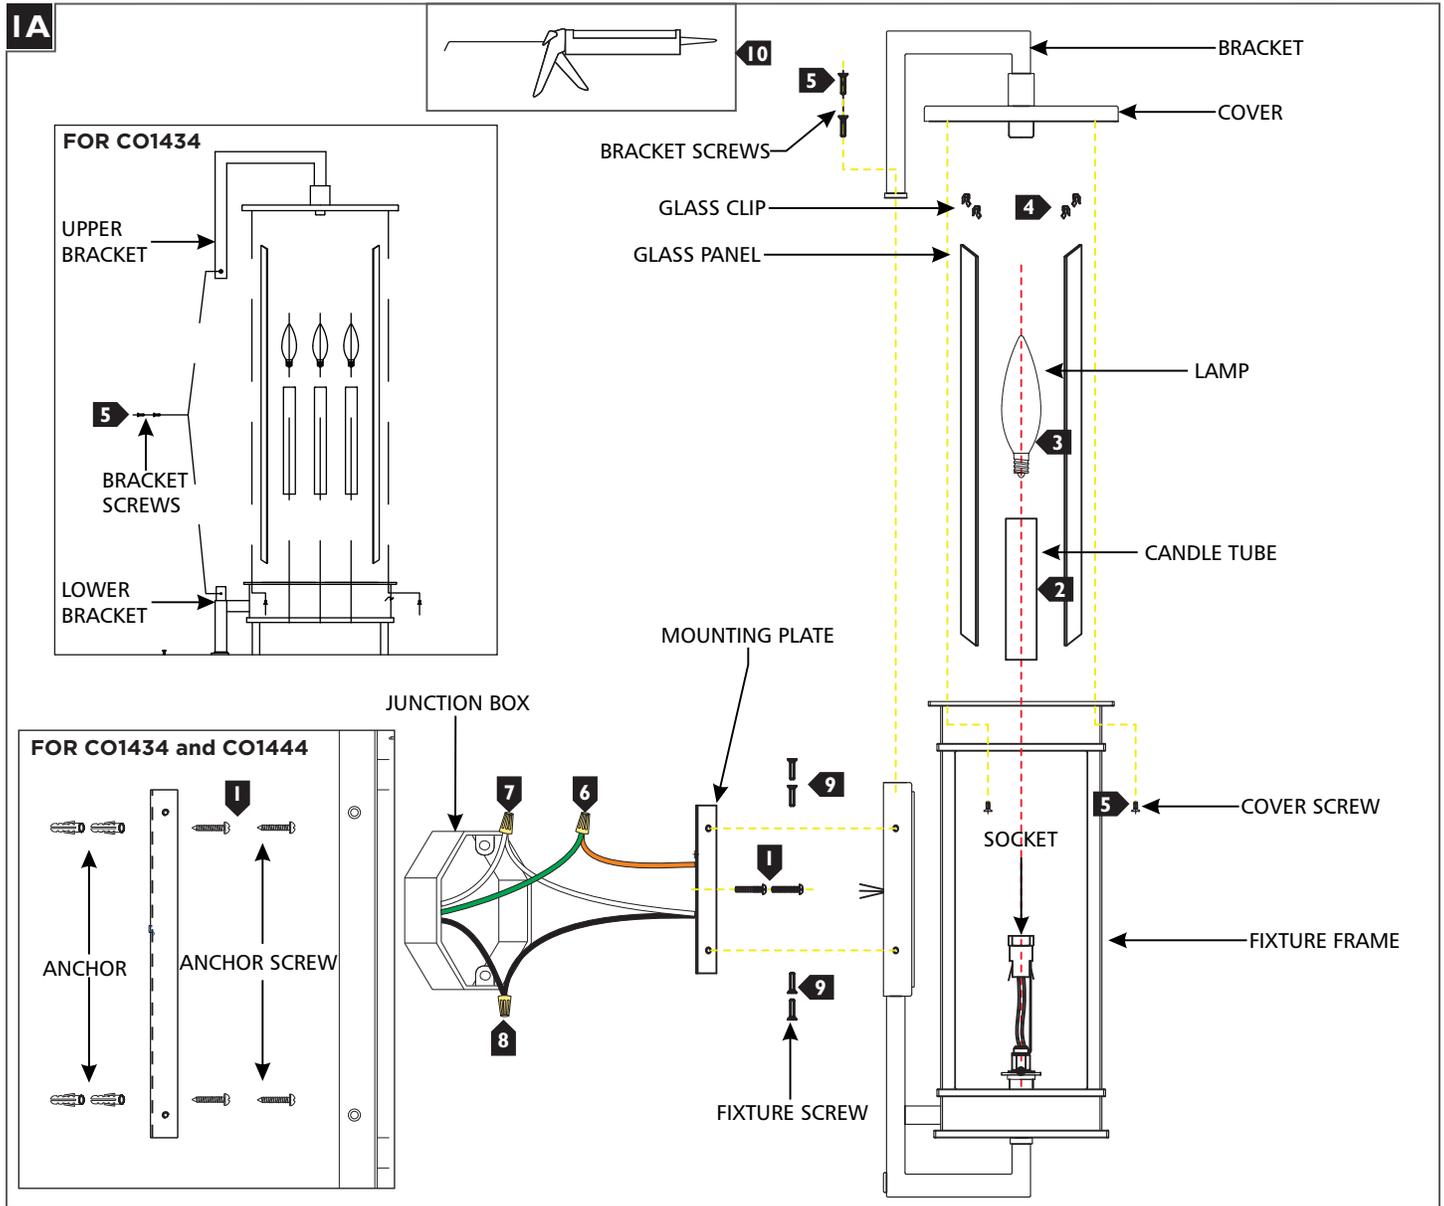LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

CAUTION - RISK OF FIRE
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

SAVE THESE INSTRUCTIONS!

VISUAL COMFORT & CO.

Install the Fixture

1A

FOR CO1434

UPPER BRACKET

5
BRACKET SCREWS

LOWER BRACKET

FOR CO1434 and CO1444

ANCHOR   ANCHOR SCREW   **1**

BRACKET

COVER

5
BRACKET SCREWS

GLASS CLIP   **4**

GLASS PANEL

LAMP

3

CANDLE TUBE

2

MOUNTING PLATE

JUNCTION BOX

7   **6**

9

1

5   COVER SCREW

SOCKET

8

9

FIXTURE SCREW

FIXTURE FRAME

10

1 Secure the mounting plate to the junction box. **Note: model CO1434 and CO1444 only**, must be secured with anchors and anchor screws.

2 Install the candle tube on to the socket assembly.

3 Screw the lamp into the socket. Refer to the label on the lamp socket for Max Wattage Information.

4 Install the glass panels into the fixture frame and secure them in place with the glass clips.

5 Install the bracket and cover on the top of the fixture frame and secure it in place with the provided screws. **Note: For CO1434 Only**: Install the upper bracket and cover to the lower bracket with the provided screws.

6 Connect the fixture to a suitable ground in accordance with local electrical codes.

7 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.

8 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.

9 Neatly place all the wires into the junction box, place the fixture base onto the mounting plate, and secure it in place using the fixture screws.

10 For wet locations, caulk around the base of the fixture with waterproof construction sealant.